

Product Technical Information Sheet


Freshfield Lane™

Square Edge Pavers

Profile Paver Type:	Rectangular	Dimensions:	200 x 100 x 65 mm	
Profile Arrises:	Square Edged	Dimensional Range:	R1	
Abrasion Resistance:	A2	Dimensional Tolerance:	L:±6mm W:±4mm T:±3mm	
Transverse Break Load:	T2	Dimensions Comment:	n/a	
Slip Skid Resistance:	U3	Reflectance Value Dry:	12.5	
Freeze/Thaw Resistance:	FP100	Reflectance Value Wet:	7.2	
Reaction to Fire:	Class A1 _(FL)	Acid Resistance:	NPD	
External Fire Performance:	Class B _(ROOF)	Dangerous Substances:	N/A	
Thermal Conductivity (P = 50):	0.45	W/m.K	Thermal Resistance (P = 50):	0.14 m ² .K/W
Thermal Conductivity (P = 90):	0.51	W/m.K	Thermal Resistance (P = 90):	0.13 m ² .K/W
Quantity per Pack:	400	Recycled Content:	0 %	
Products per Square Metre:	50	Net Dry Density:	1690 kg/m ³	
Product Weight:	2.225	kg	DoP common root reference code:	--FL65PVB--

Clay pavers are manufactured and supplied to relevant clauses of **BS EN 1344**.

Declarations of performance, environmental and other policies can be found on the company website: www.mbhplc.co.uk. Further information is available via our sales department on 0844 931 0022 or email sales@mbhplc.co.uk.

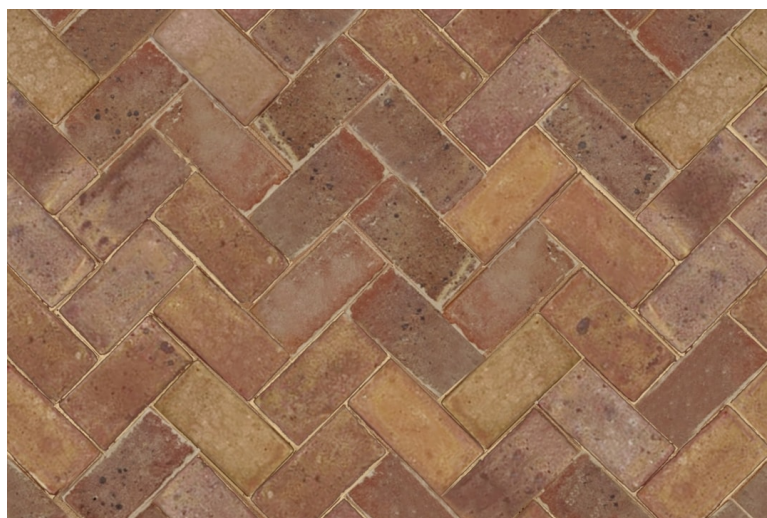

Technical data correct at the time of issue. Please order a sample for accurate representation of product.

Issue Date: 10/01/24