

# Product Technical Information Sheet


Floren.be™

## Pulsar

Configuration (EN 771.1):	Vertically Perforated Clay Facing Brick		Dimensions:	215 x 102 x 65 mm	
Compressive Strength:	>= 35	N/mm²	Dimensional Tolerance:	T2	
Compressive Strength Category:	I		Dimensional Range:	R2	
Freeze/Thaw Resistance:	F2		Water Absorption:	=< 10	%
Soluble Salts Content Category:	S2		Initial Rate of Water Absorption:	0.5 - 1.5	kg/m².min
Reaction to Fire:	Class A1		Dangerous Substances:	N/A	
Thermal Conductivity (P = 50):	0.55	W/m.K	Thermal Resistance (P = 50):	0.19	m².K/W
Thermal Conductivity (P = 90):	0.63	W/m.K	Thermal Resistance (P = 90):	0.16	m².K/W
Void Percentage:	20 - 24	%	Net Dry Density:	1950	kg/m³
Water Vapour Permeability Coefficient:	5/10		Net Density Tolerance:	D1	
Bond Strength (fixed value):	0.15	N/mm²	Gross Dry Density:	1700	kg/m³
Quantity per Pack:	460		Gross Density Tolerance:	Dm(20%)	
Recycled Content:	0	%	Product Weight:	2.28	kg
DoP common root reference code:	Nr.1-Gr1a 21-12-2022		Products per Square Metre:	60	

Clay bricks are manufactured and supplied to relevant clauses of EN 771-1.

Declarations of performance, environmental and other policies can be found on the company website: [www.mbhplc.co.uk](http://www.mbhplc.co.uk). Further information is available via our sales department on 0844 931 0022 or email [sales@mbhplc.co.uk](mailto:sales@mbhplc.co.uk).

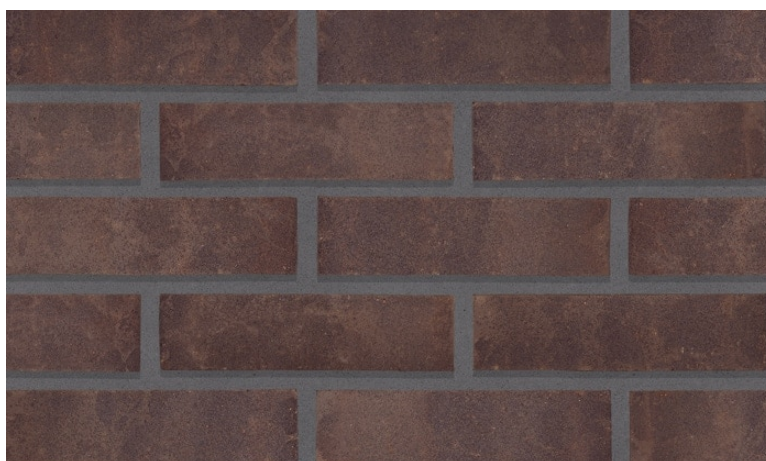

Technical data correct at the time of issue. Please order a sample for accurate representation of product.

Issue Date: 06/02/2024